




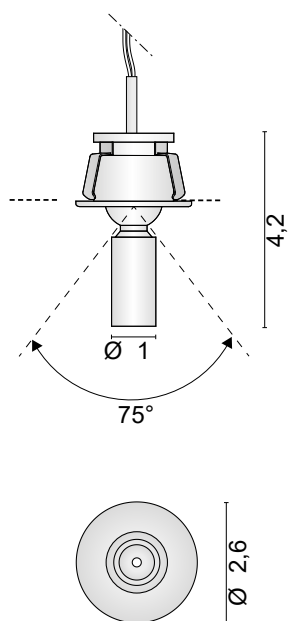





|   |   |  |
|---|---|--|
| modello:<br>model:                                  | <b>SNORKY</b>   |  |
| codice:<br>code:                                    | <b>6373</b>   |  |
| design:   | <b>UT Egoluce</b>   |  |
| anno - year:  | <b>2009</b>   |  |
| tipologia:<br>typology:                             | <b>faretto da incasso orientabile</b><br><b>adjustable recessed spotlight</b>   |  |
| materiali:<br>materials:                            | <b>alluminio</b><br><b>aluminium</b>  |  |
| luce:<br>light:                                     | <b>diretta</b><br><b>direct</b>   |  |
| sorgente luminosa:<br>light sources:                | <b>/W</b> LED 1W 350mA 158lm 4000K<br><b>/WW</b> LED 1W 350mA 150lm 3000K<br><b>/XW</b> LED 1W 350mA 143lm 2700K  |  |
| life:   | <b>&gt; 50.000 h</b>  |  |
| step MacAdam:                                       | <b>3</b>  |  |
| Indice di Resa Cromatica:<br>Color Rendering Index: | <b>&gt;80</b>   |  |
| grado IP - IP grade:                                | <b>40</b>   |  |
| peso netto - net weight:                            | <b>0,02 Kg</b>  |  |
| finitura - finishing:                               | <b>.31 cromo</b> <b>.31 chromed</b>   |  |
| optional:   | <b>0215</b> controcassa in materiale plastico<br>plastic box<br><br><b>0212</b> kit: box + plaster traforato<br>kit: box + perforated plaster   |  |
| marcatura:<br>marking:                              | <b>CE</b>   |  |
| simboli costruttivi:<br>symbols:                    |   <b>IP40</b>    |  |

## Dimensioni - Dimensions




**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**



EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
 telefono +39 02 339586.1 - fax. +39 02 3535112  
 e-mail: info@egoluce.com - http://www.egoluce.com

**0212**

KIT: box + Plaster

**0215**Controcassa in materiale plastico  
*Plastic box*EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: [info@egoluce.com](mailto:info@egoluce.com) - <http://www.egoluce.com>

## LED DRIVERS in corrente continua LED DRIVERS constant current

### 0125

**LED driver**  
IN: 100 - 240V  
OUT: 350 mA  
1-6 Power LED





6 x 3,5 x 2 cm  4 cm



SELV 

### 0128

**LED driver**  
IN: 100 - 240V  
OUT: 350 mA  
1-10 Power LED





11,6 x 3,4 x 2 cm  4 cm

SELV CLASS 2  

### 0136/15

**LED driver**  
IN: 100 - 240V  
OUT: 350 mA  
1-10 Power LED




15,8 x 2,2 x 2 cm  3,2 cm

SELV  

### 0169/50

**Multipower LED driver**  
IN: 220 - 240V  
OUT: 350mA  
min. 4 - max 22 Power LED




13 x 7,5 x 3 cm  8,5 cm

SELV 

## DRIVERS DIMMERABILI in corrente continua DIMMABLE LED DRIVERS constant current

### 0129 Dimmer LED


**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
4-15 Power LED




10,5 x 7 x 2,2 cm  7,2 cm SELV    

### 0129/DALI Dimmer LED

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
2-12 Power LED





10,5 x 7 x 2,2 cm  7,2 cm

SELV   

### 0141/DALI

**LED driver**  
IN: 110 - 240V  
OUT: 350 mA  
1-12 Power LED




11,1 x 5,2 x 2,5 cm  5,5 cm


  

### 0141/DIM

**LED driver**  
IN: 110 - 240V  
OUT: 350 mA  
1-12 Power LED




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm  5,5 cm

### 0145 Dimmer LED Maxi


**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
1- 21 Power LED



12,3 x 8 x 2,2 cm  8,4 cm SELV    

### 0145/DALI Dimmer LED Maxi

**Multipower dimmable driver**  
IN: 110 - 240V  
OUT: 350 mA  
1- 21 Power LED



12,3 x 8 x 2,2 cm  8,4 cm SELV     

### 0133

Cavo di sincronizzazione per dimmer LED  
Synchronization cable for LED dimmer  
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)




L 150 cm

## IP LED DRIVERS in corrente continua IP LED DRIVERS constant current


### 0031/IP

**LED driver**  
IN: 220 - 240V  
OUT: 350 mA  
1-12 Power LED 1W



3,9 x 8 x 2 cm

 4,2 cm IP67 SELV



EGOLUCE s.r.l., via I. Newton 12 - 20016 Pero - Milano  
telefono +39 02 339586.1 - fax. +39 02 3535112  
e-mail: info@egoluce.com - http://www.egoluce.com