
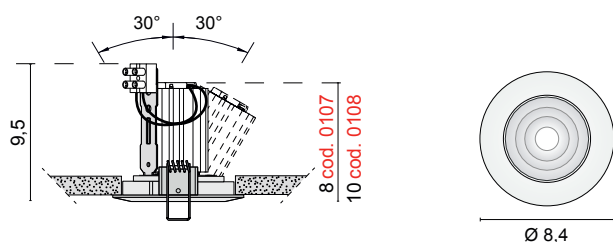


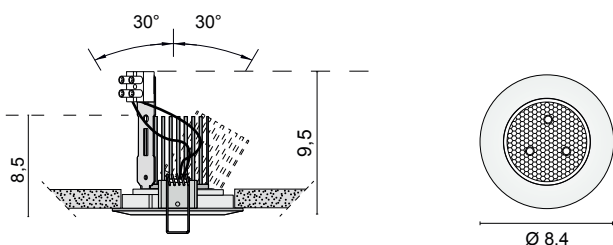

Dimensioni - Dimensions

7,5 cm

GEKO TONDO + COB LED**GEKO TONDO + POWER LED**
 modello:
model:
**GEKO TONDO
ADJUSTABLE**
 codice:
code:
6447

design:

UT Egoluce

anno - year:

2016

tipologia:

**faretto orientabile ad incasso
adjustable recessed spotlight**materiali:
materials:**alluminio pressofuso
die-cast aluminium**

luce:

diretta

light:

direct

finiture - finishes:

.01 bianco	.01 white
.02 nero	.02 black
.03 grigio	.03 grey
.21 dorato lucido	.21 shiny golded
.25 dorato satinato	.25 satin golded
.31 cromato	.31 chromed
.32 nickel satinato	.32 satin nickel

 sorgente luminosa:
light sources:
6447 + COB LED

LED code	optic degree		LED color
0107/XW	/24 /40 /60	6,2W 17,8V 350mA	896lm 2700K
0107/WW	/24 /40 /60	6,2W 17,8V 350mA	939lm 3000K
0107/W	/24 /40 /60	6,2W 17,8V 350mA	975lm 4000K
0107/CW	/24 /40 /60	6,2W 17,8V 350mA	1066lm 5000K
0108/XW	/24 /40 /60	9,2W 18,4V 500mA	1244lm 2700K
0108/WW	/24 /40 /60	9,2W 18,4V 500mA	1303lm 3000K
0108/W	/24 /40 /60	9,2W 18,4V 500mA	1353lm 4000K
0108/CW	/24 /40 /60	9,2W 18,4V 500mA	1480lm 5000K
0108/WW/IP (IP44)	/24 /38 /58	9,2W 18,4V 500mA	1303lm 3000K
0108/W/IP (IP44)	/24 /38 /58	9,2W 18,4V 500mA	1353lm 4000K

6447 + POWER LED

LED code	optic degree		LED color
0121	25°	3x3W 700mA	846lm 4000K
0123	25°	3x3W 700mA	804lm 3000K

optionals:

**dischetto reggi lampadina
bulb stopper**
 0183/ST satinato satin
 0183/TR trasparente transparent

grado IP - IP grade:

20

peso netto - net weight:

0,10 Kg

marcatura:



marking:

 simboli costruttivi:
symbols:
**SOLO COLLEGAMENTO IN SERIE - ONLY SERIAL CONNECTION**

Drivers x COB LED 350mA (art. 0107)

LED DRIVERS in corrente continua LED DRIVERS constant current

0125

LED driver

IN: 100 - 240V
OUT: 350 mA
1 COB LED (art. 0107)




6 x 3,5 x 2 cm 4 cm

SELV

0128

LED driver

IN: 100 - 240V
OUT: 350 mA
1-2 COB LED (art. 0107)




11,6 x 3,4 x 2 cm 4 cm

SELV CLASS 2

0136/15

LED driver

IN: 100 - 240V
OUT: 350 mA
1-2 COB LED (art. 0107)




15,8 x 2,2 x 2 cm 3,2 cm

SELV

0169/50

Multipower LED driver

IN: 220 - 240V
OUT: 350mA
1-3 COB LED (art. 0107)



13 x 7,5 x 3 cm 8,5 cm


SELV

DRIVERS DIMMERABILI in corrente continua DIMMABLE LED DRIVERS constant current

0129 Dimmer LED

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED (art. 0107)




10,5 x 7 x 2,2 cm 7,2 cm SELV

0129/DALI Dimmer LED

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA 1-2 COB LED (art. 0107)




10,5 x 7 x 2,2 cm 7,2 cm SELV

0141/DALI

LED driver

IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED (art. 0107)




11,1 x 5,2 x 2,5 cm 5,5 cm

0141/DIM

LED driver

IN: 110 - 240V
OUT: 350 mA, 1-2 COB LED (art. 0107)




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm 5,5 cm

0145 Dimmer LED Maxi

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 1-3 COB LED (art. 0107)




12,3 x 8 x 2,2 cm 8,4 cm SELV

0145/DALI Dimmer LED Maxi

Multipower dimmable driver

IN: 110 - 240V
OUT: 350 mA, 1-3 COB LED (art. 0107)



12,3 x 8 x 2,2 cm 8,4 cm SELV

0133


Cavo di sincronizzazione per dimmer LED
Synchronization cable for dimmer LED
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)
L 150 cm



0726/DIM

LED dimmer

TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
IN: 220 - 240V
OUT: 24V - 20W
350 mA, 1-2 COB LED (art. 0107)




16,5 x 4,5 x 3,5 cm 5,6 cm IGBT-TRIAC SELV

0733/DIM

LED dimmer

Alimentatori elettronici dimmerabili (IGBT-TRIAC) in corrente continua
Direct current dimmable (TRAILING EDGE-LEADING EDGE) electronic drivers
IN: 220 - 240V
OUT: 350 mA, 1 COB LED (art. 0107)




8,7 x 3,8 x 2,1 cm 4,2 cm IGBT-TRIAC SELV

IP LED DRIVERS in corrente continua IP LED DRIVERS constant current

0031/IP

LED driver

IN: 220 - 240V
OUT: 350 mA
1-2 COB LED (art. 0107)



3,9 x 8 x 2 cm 4,2 cm


IP67 SELV



Drivers x COB LED 500mA (art. 0108)

LED DRIVERS in corrente continua
LED DRIVERS constant current**0127**


LED driver
IN: 100 - 240V
OUT: 500 mA
1 COB LED (art. 0108)



11,6 x 3,4 x 2 cm 4 cm

0147/COB


LED driver
IN: 220 - 240V
OUT: 500 mA
1-2 COB LED (art. 0108)



12,5 x 3,8 x 2,4 cm 4,2 cm

0149/COB


LED driver
IN: 220 - 240V
OUT: 500 mA
1 COB LED (art. 0108)



7,6 x 3,9 x 2,2 cm 4,2 cm

0169/50


Multipower LED driver
IN: 220 - 240V
OUT: 500mA
1-3 COB LED (art. 0108)



13 x 7,5 x 3 cm 8,5 cm

DRIVERS DIMMERABILI in corrente continua
DIMMABLE LED DRIVERS constant current**0129 Dimmer LED**


Multipower dimmable driver
IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)



10,5 x 7 x 2,2 cm 7,2 cm SELV

0129/DALI Dimmer LED


Multipower dimmable driver
IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)



10,5 x 7 x 2,2 cm 7,2 cm SELV

0141/DALI


LED driver
IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)



11,1 x 5,2 x 2,5 cm 5,5 cm

0141/DIM

LED driver
IN: 110 - 240V
OUT: 500 mA, 1-2 COB LED (art. 0108)




Versione PUSH non sincronizzabile - PUSH version not synchronizable

11,1 x 5,2 x 2,5 cm 5,5 cm

0145 Dimmer LED Maxi
Multipower dimmable driver


IN: 110 - 240V
OUT: 500 mA, 1-3 COB LED (art. 0108)



12,3 x 8 x 2,2 cm 8,4 cm SELV

0145/DALI Dimmer LED Maxi
Multipower dimmable driver

IN: 110 - 240V
OUT: 500 mA, 1-3 COB LED (art. 0108)



12,3 x 8 x 2,2 cm
 8,4 cm SELV

0133


Cavo di sincronizzazione per dimmer LED
Synchronization cable for dimmer LED
(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



L 150 cm

0726/DIM


LED dimmer
TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)
IN: 220 - 240V
OUT: 24V - 20W
500 mA, LED, 1-2 COB LED (art. 0108)



16,5 x 4,5 x 3,5 cm 5,6 cm IGBT-TRIAC SELV

0734/DIM


LED dimmer
Alimentatori elettronici dimmerabili (IGBT-TRIAC) in corrente continua
Direct current dimmable (TRAILING EDGE-LEADING EDGE) electronic drivers
IN: 220 - 240V
OUT: 500 mA, 1 COB LED (art. 0108)




8,7 x 3,8 x 2,1 cm 4,2 cm IGBT-TRIAC SELV

IP LED DRIVERS in corrente continua
IP LED DRIVERS constant current**0143/IP**

LED driver
IN: 220 - 240V
OUT: 500 mA
1 COB LED (art. 0108)



8,2 x 3,9 x 2 cm 4,5 cm IP67 SELV




Drivers x POWER LED 700mA 3x3W (art. 0121 - 0123)

LED DRIVERS in corrente continua
LED DRIVERS constant current**0126****LED driver**

IN: 110 - 240V

OUT: 700 mA

1-2 Power LED 3x3W (art. 0121 - 0123)



SELV CLASS 2


11,2 x 3,9 x 2,8 cm 4,8 cm

0148/COB**LED driver**

IN: 220 - 240V

OUT: 700 mA

1-3 Power LED 3x3W (art. 0121 - 0123)



12,5 x 3,8 x 2,4 cm 4,2 cm


SELV

0169/50**Multipower LED driver**

IN: 220 - 240V

OUT: 700mA

min. 2 - max 5 Power LED 3x3W (art. 0121 - 0123)




13 x 7,5 x 3 cm 8,5 cm

SELV

DRIVERS DIMMERABILI in corrente continua
DIMMABLE LED DRIVERS constant current**0129 Dimmer LED****Multipower dimmable driver**

IN: 110 - 240V

OUT: 700 mA, 1-4 Power LED 3x3W (art. 0121 - 0123)




10,5 x 7 x 2,2 cm 7,2 cm SELV

0129/DALI Dimmer LED**Multipower dimmable driver**

IN: 110 - 240V

OUT: 700 mA, 1-4 Power LED 3x3W (art. 0121 - 0123)




10,5 x 7 x 2,2 cm 7,2 cm SELV

0141/DALI**LED driver**

IN: 110 - 240V

OUT: 700 mA, 1-2 Power LED 3x3W (art. 0121 - 0123)




11,1 x 5,2 x 2,5 cm 5,5 cm

0141/DIM**LED driver**

IN: 110 - 240V

OUT: 700 mA, 1-2 Power LED 3x3W (art. 0121 - 0123)


**Versione PUSH non sincronizzabile - PUSH version not synchronizable**

11,1 x 5,2 x 2,5 cm 5,5 cm

0145 Dimmer LED Maxi**Multipower dimmable driver**

IN: 110 - 240V

OUT: 700 mA, 1-6 Power LED 3x3W (art. 0121 - 0123)




12,3 x 8 x 2,2 cm 8,4 cm SELV

0145/DALI Dimmer LED Maxi**Multipower dimmable driver**

IN: 110 - 240V

OUT: 700 mA, 1-6 Power LED 3x3W (art. 0121 - 0123)



12,3 x 8 x 2,2 cm


8,4 cm SELV

0133

Cavo di sincronizzazione per dimmer LED

Sincronization cable for dimmer LED

(art. 0129 - art. 0129/DALI - art. 0145 - art. 0145/DALI)



L 150 cm

0726/DIM**LED dimmer**


TAGLIO DI FASE (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)

PHASE CUT-OFF (IGBT-TRIAC, TRAILING EDGE-LEADING EDGE)

IN: 220 - 240V

OUT: 24V - 20W

700 mA, 1-3 Power LED 3x3W (art. 0121 - 0123)



16,5 x 4,5 x 3,5 cm 5,6 cm IGBT-TRIAC

UNITA' DI EMERGENZA LED
LED EMERGENCY UNIT**UNITA' DI EMERGENZA DISPONIBILE PER COB E POWER LED****EMERGENCY UNIT AVAILABLE FOR COB AND POWER LED****0115/EM****LED Emergency Unit**

Kit Inverter + Battery + LED indicator



15,5 x 5,2 x 2,5 cm 80 cm 13,5 x 4,5 x 2,3 cm

EGOLUCE s.r.l, via I.Newton 12 - 20016 Pero - Milano
telefono +39 02 339586.1 - fax. +39 02 3535112
e-mail: info@egoluce.com - http://www.egoluce.com